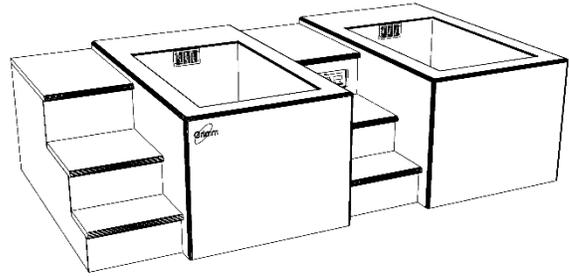


Cold₂Warm Hydrotherapy System

Modular CRYOTherm ReadyFit Systems are pre-engineered for faster delivery and incorporate our exclusive energy efficient Cold₂Warm system. Both cold and warm tanks offer whole-body and extremity immersion. Water temperatures are precisely maintained with an internal refrigeration system, no need to add ice or hot water. Standard protocol recommends draining and cleaning only once a week. This self-contained unit fits through a standard 3 ft. x 7 ft. door opening and can be installed in new or existing wet areas with minimum site preparation.

**Stainless Steel Tanks**

Both tanks are 48" long, 30" wide, and 28" deep with a capacity of 162 gallons. They are formed and welded from 14-gauge Type 304 stainless steel into a seamless unit with covered corners for easy cleaning. These high-quality stainless-steel tanks assure maximum sanitation and provide a lifetime of durable service.

Corian Surface

The exterior is covered with Cameo White Corian solid surface material. This comfortable and easy to clean surface is extremely durable. A wide variety of Corian colors are available for the step surfaces.

Hydrotherapy System

Independent dual-speed pumps provide circulation for each tank. Press the timer button and hydrotherapy action is delivered through two Comfort-Flo nozzles for 20 minutes. Air controls activate turbo-boost for smooth, high-volume air/water flow.

Cartridge Filters

Water cleanliness and clarity is maintained with 100% circulation through replaceable 50 sq. ft. cartridge filters.

Water Level Controls

Both tanks have automatic water level controls to maintain a constant water level. These eliminate manual filling, replace water volume displaced by immersion, and help refresh the tanks.

Heat Recovery System

Our unique energy efficient refrigeration system warms the right tank with heat recovered while cooling the left tank. The right tank can also be switched from warm to cold when both tanks are needed for cryotherapy. System is charged with environmentally friendly, zero ozone depletion potential, R-407A refrigerant.

Temperature Controls

Electronic controls accurately maintain and digitally display water temperatures to within 0.1°F in both tanks. The left tank is adjustable from 40°F to 70°F, the right tank from 40°F to 110°F.

Foamed-In-Place Insulation

At least six inches of foamed-in-place polyurethane insulation surrounds and supports both tanks. This exceptional insulation significantly reduces heat loss. CRYOTherm pays for itself with energy and water savings when compared to conventional whirlpools.

Optional Corian Logo Inlays




Logo inlay pricing is based on the number of Corian colors required. Your logo is carved into the Corian exterior with a CNC router. Individual logo pieces are also carved from the desired Corian color(s) and inlaid to create your custom graphic.

Installation

Delivery, installation supervision, and field-testing are included with all CRYOTherm Cold₂Warm Hydrotherapy Consoles.



Specifications

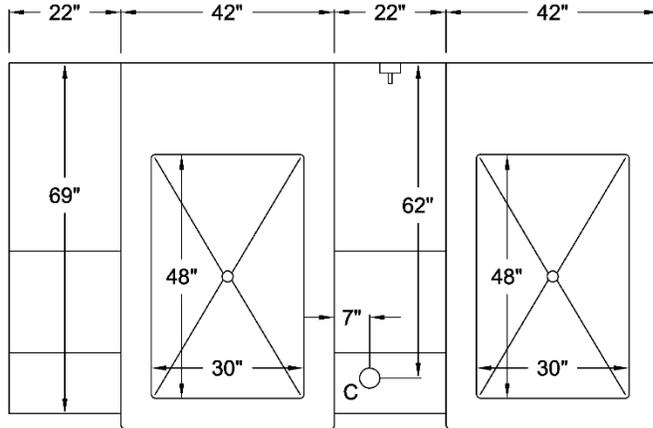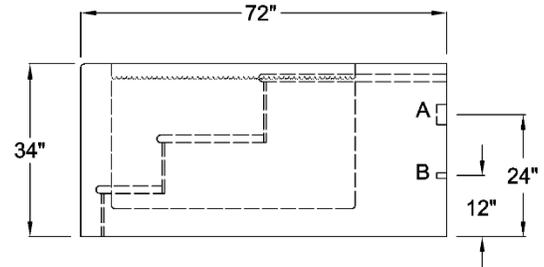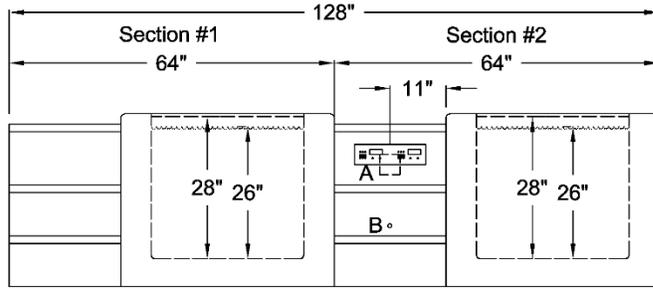

FDA Listed Medical Device
ETL Certified to Meet UL 1795
Standard for Safety – Hydrotherapy
Bathtubs

Left Tank.....40°F to 70°F
 Right Tank.....40°F to 110°F
 Tank Capacities.....162 gal.
 Weight (Filled).....4,652 lb.
 Weight (Empty).....1,950 lb.

Shipped in two sections
 Weight (Section #1).....875 lb.
 Weight (Section #2).....1,075 lb.

One-Year Warranty

The CRYOTherm warranty applies to purchaser and any subsequent owner. Grimm Scientific Industries, Inc. (warrantor) warrants this product to be free from defects in material and workmanship under normal use for one year from the date the product is installed. The warrantor may opt to replace the product, rather than repair it. This warranty does not cover damage resulting from accidents, improper use, or maintenance of this product, and in no case shall warrantor's liability exceed the original purchase price paid for the product. This warranty is expressly in lieu of all other express warranties.

Contact Us:

Grimm Scientific Industries, Inc
 P.O. Box 2143
 Marietta, OH 45750
 Phone....800-223-5395
 Fax.....740-374-5745
 E-mail....grimm@ee.net

A = Electrical Connection

208V, 60Hz, Single Phase 4-Wire
Rating at Full Load = 20 Amp Max
* Circuit Breaker = 2-Pole, 30 Amp, GFCI
* Wall Outlet = NEMA 14-30R

B = Cold Water Supply Connection

* Pipe Size = ¾ FPT Brass
Backflow Preventer = Included with CRYOTherm
Water Temperature = 45°F Min. 80°F Max.
Water Pressure = 20 PSI Min. 60 PSI Max.

C = Drain

Pipe Size = 1-1/2" Copper
Flow = 40 GPM
* Floor Sink with 4-Inch Drain is recommended

(* Supplied by Customer)

