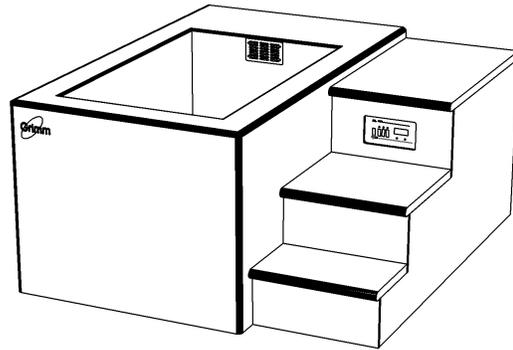


Cold Hydrotherapy System

Modular CRYOTherm ReadyFit Systems are pre-engineered for faster delivery and incorporate our exclusive energy efficient Cold system. Each tank offers whole-body and extremity immersion. Water temperatures are precisely maintained with an internal refrigeration system, no need to add ice. Standard protocol recommends draining and cleaning only once a week. This self-contained unit fits through a standard 3 ft. x 7 ft. door opening and can be installed in new or existing wet areas with minimum site preparation.

**Stainless Steel Tanks**

Tank is 48" long, 30" wide, and 28" deep with a capacity of 162 gallons. It is formed and welded from 14-gauge Type 304 stainless steel into a seamless unit with coved corners for easy cleaning. This high-quality stainless-steel tank assures maximum sanitation and provides a lifetime of durable service.

Corian Surface

The exterior is covered with Cameo White Corian solid surface material. This comfortable and easy to clean surface is extremely durable. A wide variety of Corian colors are available for the step surfaces.

Hydrotherapy System

A dual-speed pump provides high volume circulation. Press the timer button and hydrotherapy action is delivered through two Comfort-Flo nozzles for 20 minutes. Air controls activate turbo-boost for smooth, high-volume air/water flow.

Cartridge Filters

Water cleanliness and clarity is maintained with 100% circulation through replaceable 50 sq. ft. cartridge filters.

Water Level Controls

An automatic water level control maintains a constant water level. This eliminates manual filling, replaces water volume displaced by immersion, and helps refresh the tanks.

Cooling System

A self-contained energy efficient refrigeration system chills the water. The system is charged with environmentally friendly, zero ozone depletion potential, R-407A refrigerant.

Temperature Controls

Electronic controls accurately maintain and digitally display water temperature to within 0.1°F. The temperature is adjustable from 40°F to 70°F.

Foamed-In-Place Insulation

At least six inches of foamed-in-place polyurethane insulation surrounds and supports both tanks. This exceptional insulation significantly reduces heat loss. CRYOTherm pays for itself with energy and water savings when compared to conventional whirlpools.

Optional Corian Logo Inlays




Logo inlay pricing is based on the number of Corian colors required. Your logo is carved into the Corian exterior with a CNC router. Individual logo pieces are also carved from the desired Corian color(s) and inlaid to create your custom graphic.

Installation

Delivery, installation supervision, and field-testing are included with all CRYOTherm Cold2Warm Hydrotherapy Consoles.



Specifications

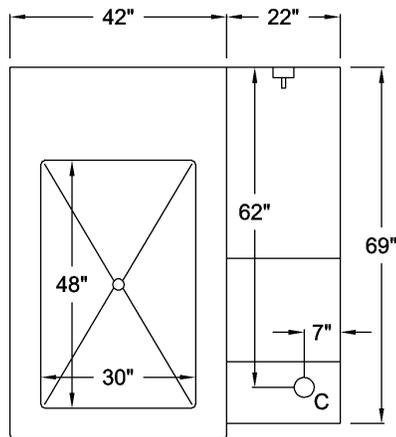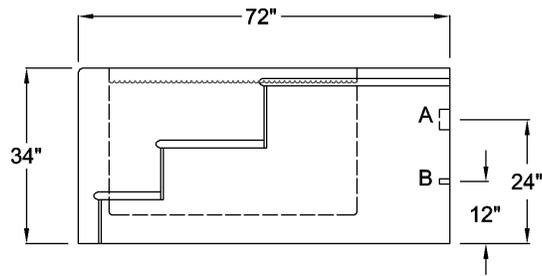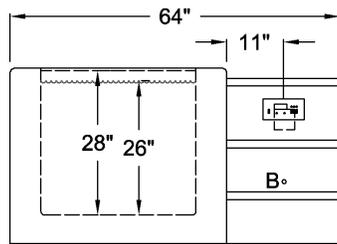

FDA Listed Medical Device
ETL Certified to Meet UL 1795
Standard for Safety – Hydrotherapy
Bathtubs

Temperature.....40°F to 70°F
 Tank Capacity.....162 gal.
 Weight (Filled).....2,426 lb.
 Weight (Empty).....1,075 lb.

One-Year Warranty

The CRYOTherm warranty applies to purchaser and any subsequent owner. Grimm Scientific Industries, Inc. (warrantor) warrants this product to be free from defects in material and workmanship under normal use for one year from the date the product is installed. The warrantor may opt to replace the product, rather than repair it. This warranty does not cover damage resulting from accidents, improper use, or maintenance of this product, and in no case shall warrantor's liability exceed the original purchase price paid for the product. This warranty is expressly in lieu of all other express warranties.

Contact Us:

Grimm Scientific Industries, Inc
 P.O. Box 2143
 Marietta, OH 45750
 Phone....800-223-5395
 Fax.....740-374-5745
 E-mail....grimm@ee.net

A = Electrical Connection

208V, 60Hz, Single Phase 4-Wire
Rating at Full Load = 21 Amp Max
* Circuit Breaker = 2-Pole, 30 Amp, GFCI
* Wall Outlet = NEMA 14-30R

B = Cold Water Supply Connection

* Pipe Size = 3/4 FPT Brass
Backflow Preventer = Included with CRYOTherm
Water Temperature = 45°F Min. 80°F Max.
Water Pressure = 20 PSI Min. 60 PSI Max.

C = Drain

Pipe Size = 1-1/2" Copper
Flow = 40 GPM
*Floor Sink with 4-Inch Drain is recommended

(* Supplied by Customer)

